

TUFF-RIB PANELS




Live Oak Metal Works & Supply's Tuff-Rib Panels are exposed fastener roofing and wall panels that are suitable for residential, agricultural, and light commercial applications. These versatile panels combine the longevity of Galvalume® coated steel sheet that's been made in the USA with the proven performance of Sherwin-Williams® WeatherXL™ silicone modified polyester coatings.

TECHNICAL SPECIFICATIONS

- Anti-siphon groove prevents wind-driven rain and water infiltration while safeguarding against siphoning or wicking under the panel lap, ensuring roof deck protection from moisture.
- 29-gauge.
- Strong and durable Grade 80 steel with a minimum 80,000 lbs/in² yield strength.
- 36" coverage.
- 3/4" rib height.
- 3:12 minimum slope.
- Painted AZ50 Galvalume[®] steel with industry-leading Sherwin-Williams[®] Weather XL paint system or mill finish AZ55 Galvalume steel with a clear acrylic coating.

TUFF-RIB PANEL PROFILE

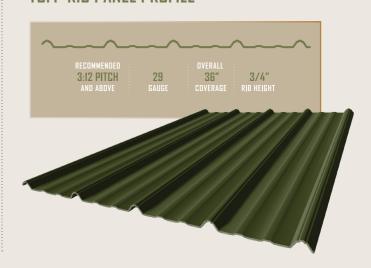




TUFF-RIB PANELS


Live Oak Metal Works & Supply Tuff-Rib Panels start with Prime 29-gauge Galvalume® steel sheet that's been made in the USA. They're available in a variety of durable Sherwin-Williams® WeatherXL™ "cool" coatings, or in a mill finish with a protective clear acrylic coating. A properly-installed metal roof from Live Oak Metal Works will last a lifetime, providing unmatched durability and will be resistant to fire, rot, insects, and extreme weather.

FEATURES

- Tuff-Rib Panels are the most widely specified residential roofing panels and are generally compliant with the roofing industry's highest standards for impact resistance, fire resistance, and wind uplift:
 - UL2218 Class 4 Impact Resistance.
 - UL790 Class A Fire Resistance.
 - UL580 Class 90 Wind Uplift.
- Available in 29-gauge.
- Generous 3-foot coverage.
- Anti-siphon groove prevents wind-driven rain and water infiltration while safeguarding against siphoning or wicking under the panel lap, ensuring roof deck protection from moisture.
- Custom lengths from 3 ft. to 40 ft. or longer.
- 50-year substrate warranty on painted AZ50 Galvalume[®] steel sheet or 45-year warranty on acrylic-coated Galvalume[®] steel sheet.
- Our metal roofing panels will also feature sophisticated Sherwin-Williams[®] "cool" coatings that contain solar-reflective pigments, keeping roofs cooler and conducting less heat into the buildings, reducing energy costs.
- 40-year paint warranty (for film integrity, with 30-years for chalk and fade).
- Standard and custom trim and all the accessories and tools needed for a quality installation.













liveoakmetals.com

3216 Industry Blvd., Florence, South Carolina 29501 **(843) 713-8600**



